

RECEIVED PCTO 14 DEC 2004

10/518031

PCT/GB2004/004061



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales 22 OCT 2004
NP10 800
WIPO PCT

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 1 October 2004

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1

Patents Act 1977
(Rule 16)

THE PATENT OFFICE

Z

26 SEP 2003

NEWPORT

The
Patent
Office

26SEP03 E840212-1 D02565
P01/7700 0.00-0322564.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

XA1823

2. Patent application number

(The Patent Office will fill in this part)

0322564.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MBDA UK Limited

Six Hills Way
Stevenage
Hertfordshire, SG1 2DA

Patents ADP number (if you know it)

08339350001

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

PROCESSING ELECTRONIC SIGNALS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BAE SYSTEMS plc
Group IP Department
Lancaster House, P.O. Box 87
Farnborough Aerospace Centre
Farnborough, Hampshire, GU14 6YU

Patents ADP number (if you know it)

07914674002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 8 ✓

Claim(s) 2 ✓

Abstract 1 ✓ 

Drawing(s) 9+9 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature


Margaret MACKETT

Date

24/09/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Jeremy Goddin 01252 384625

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

PROCESSING ELECTROMAGNETIC SIGNALS

This invention relates to an electromagnetic signal processing system and more specifically, but not exclusively, to a system of processing an optical
5 signal.

WO02/29436 teaches that a laser-radar receiver should comprise an array of optical fibres which are connected to at least one radiation detector, each optical fibre having differing physical characteristics which result in known delays in the transmission time of pulsed electromagnetic radiation. Such
10 delays are conveniently achieved by using optical fibres of differing lengths so that they operate as delay lines. Arrays of 3 x 3 optical fibres are taught, with each optical fibre connected to a single avalanche photo-diode (APD).

According to the present invention an electromagnetic signal processing system comprises a plurality of optical fibre arrays, each optical fibre array
15 having a cluster of optical fibres with their one ends oriented to receive electromagnetic radiation and arranged to transmit electromagnetic radiation to an array output, and the array outputs are connected to transmit electromagnetic radiation in sequence to a signal detector input. In this manner the outputs from a plurality of optical fibre arrays can be fed into a
20 single signal detector. In each optical fibre array the cluster of optical fibres serve as time delays, the time delay being proportional to the individual fibre length.

Preferably, the sequential connection of the array outputs is through at least one optical delay. In this manner the signal detector is enabled to
25 discriminate between the array outputs whilst allowing trade-offs in the length of the optical fibre and consequently a reduction in the mass, volume and cost.

The optical fibre arrays may be arranged as a plurality of array groups, each array group having a respective array group output, and the array group outputs are connected in series by respective optical delays to the signal
30 detector input. In this manner the signal detector is enabled to discriminate between the array group outputs. Alternatively, the optical fibre arrays may be

arranged as a plurality of array groups, each array group having a respective array group output, and an array group output of one array group is connected to an input to another array group. In this case the connection of the array group output from one array group to the input of the other array group may be
5 through an optical delay. In this manner the signal detector is enabled to discriminate between the array group outputs.

The optical fibre arrays may be arranged as a plurality of array groups, each array group having a respective array group output, and an optical switch is arranged operatively between the array group outputs and the signal detector
10 input. In this manner radiation from one or more of the array group outputs may be connected, or disconnected, to the signal detector input.

A source of electromagnetic radiation may be arranged to radiate discrete pulses of radiation through the array outputs towards the one end of the optical fibres. In this manner the system is able to radiate electromagnetic
15 radiation through the one end of the optical fibres as well as receiving electromagnetic radiation for the signal detector.

At least two of the array group outputs may include respective source of electromagnetic radiation arranged to radiate discrete pulses of radiation through the array group outputs towards the one end of the optical fibres, and
20 each source of electromagnetic radiation is arranged so that it may produce its discrete pulses of radiation with different characteristics. The different characteristics could, for example, be direction, timing, wavelength, or modulation format.

At least one of the optical delays is preferably provided by a length of
25 optical fibre. Indeed all of the optical delays may be in the form of lengths of optical fibre. However, any convenient form of optical delay may be used subject, of course, to the operational parameters of the electromagnetic signal processing system. For instance, optical delay devices may be provided using the technology reported in 'Catch the wave', published on 5 June 1999 in
30 New Scientist Vol. 162, issue 2189, page 28 or in 'Variable semiconductor all-optical buffer' by P C Ku, C J Chang-Hasnain and S L Chuang published on 21 November 2002 in Electronics Letters Vol. 38, No. 24, pages 1531 - 1533.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

Figure 1 is a diagram of a state of the art electromagnetic signal processing system.

5 Figure 2 is a diagram illustrating a two stage electromagnetic signal processing system taught by the present invention.

Figure 3 is a diagram illustrating a modification to the system of Figure 2.

Figure 4 is a diagram illustrating a three stage electromagnetic signal processing system taught by the present invention.

10 Figure 5 shows a modification to the system of Figure 4 to enable the system to radiate electromagnetic radiation.

Figure 6 illustrates a modification of the system shown in Figure 5.

Figure 7 is a diagram illustrating a modification of the system shown in Figure 4.

15 Figure 8 is a diagram of an electromagnetic signal processing system having three stages taught by the present invention, and

Figure 9, is a diagram illustrating another three stage electromagnetic signal processing system taught by the present invention.

20 In Figure 1 an electronic signal processing system 10 comprises six individual optical fibre arrays 11, 12, 13, 14, 15 and 16 having respective array outputs 21, 22, 23, 24, 25, and 26 connected to respective signal detectors 31, 32, 33, 34, 35 and 36.

Each optical fibre array 11, 12, 13, 14, 15 and 16 comprises a cluster of nine optical fibres. One end of each fibre is depicted by the small circles 40, each set of nine fibres being positively located in predetermined relative positions in respective array boards 41, 42, 43, 44, 45 and 46 which, in use, would each be mounted to face a direction from which an electromagnetic signal may be received. Although the array boards 41, 42, 43, 44, 45 and 46 are all shown as being rectangular with the nine optical fibres 40 arranged
30 equally-spaced in a 3 x 3 matrix, each array board 41, 42, 43, 44, 45 and 46

may be of any convenient shape and its cluster of optical fibres may be any required number arranged in any suitable manner to receive electromagnetic radiation. The array boards may face either in the same direction or may be oriented to receive electromagnetic radiation from different directions. Instead
5 of being mounted in the array boards, the optical fibres may be mounted directly through any convenient support structure.

Each cluster of optical fibres 40 is operatively connected to the respective array output 21, 22, 23, 24, 25 and 26 for instance in one of the sequential arrangements taught by WO 02/29436. Any electromagnetic
10 radiation received through the one end of any of the optical fibres 40 will therefore be transmitted to the respective signal detector 31, 32, 33, 34, 35 and 36 for identification and/or processing.

In the drawings, the optical fibre arrays 11, 12, 13, 14, 15 and 16 are depicted in a simplified manner with the three optical fibres 40 for only the right-
15 hand column being drawn. It should be understood that all nine optical fibres 40 of each optical fibre array are sequentially connected to the respective array output so that there is an inbuilt time delay between the transmission by each optical fibre 40. In this manner the respective signal detector 31, 32, 33, 34, 35 or 36 is able to identify the optical fibre from which an electromagnetic signal is
20 received.

The state of the art, as described with reference to Figure 1, teaches the use of multiple optical fibre arrays 11, 12, 13, 14, 15 and 16 which receive electromagnetic signals and transmit them, through optical fibres and the respective array output 21, 22, 23, 24, 25 or 26, to the respective signal
25 detector 31, 32, 33, 34, 35 or 36. This form of electromagnetic signal processing system requires the provision of a significant number of signal detectors (six signal detectors in Figure 1) and incurs a cost and weight penalty together with the need to assess and co-ordinate the information gleaned from the electromagnetic signals by the multiple detectors.

30 With reference to Figure 2, the optical fibre arrays are of the same construction as described in Figure 1, but the optical fibre arrays 11, 12 and 13 are arranged as an array group A with their array outputs 21, 22 and 23.

- 5 -

sequentially connected by optical delays 50 and 51 to a joint output 52 for transmitting electromagnetic signals to an input 53 of a single signal detector 54.

In this manner, the transmission to the signal detector 54 of an electromagnetic signal received by the optical fibre delay 11, will be delayed by both optical delay 50 and optical delay 51, whereas any electromagnetic signal received by the optical fibre array 12 will be delayed by the optical delay 51. Consequently, the detector 54 will receive a sequential cascade of signals, a first set being received by the optical fibre array 13, the second set being received by the optical fibre array 12 but delayed by the optical delay 51, and the third set being received by the optical fibre array 11 and being delayed by the optical delays 50 and 51. By cascading the receipt of electromagnetic signals in this manner, the signal detector 54 is able to discriminate between electromagnetic signals received by the three optical fibre arrays 11, 12 and 13.

From Figure 2 it will be noted that the optical fibre arrays 14, 15 and 16 are arranged as a second array Group B with their array outputs 24, 25 and 26 sequentially connected by optical delays 55 and 56 to a joint output 57 for transmitting electromagnetic signals to an input 58 of a signal detector 59.

Array Group B is therefore a duplicate of array Group A and operates in exactly the same manner. The optical delays 50, 51, 55 and 56 enable only two signal detectors 54 and 59 to process all of the electromagnetic signals received from the six optical fibre arrays 11, 12, 13, 14, 15 and 16. The dashed vertical lines indicate that the system is formed in two stages, the first stage being the six optical fibre arrays comprising the state of the art as shown in Figure 1, the second stage being the four delay lines 50, 51, 55 and 56. The provision of the second stage reduces the number of signal detectors required. The number of optical fibre arrays forming a group (such as Group A or Group B) can be increased or decreased as desired within the capabilities of the associated signal detector 54, 59.

Although Figure 2 shows the arrangement of delay lines 50, 51, 55 and 56 in the second stage, further stages of delay lines may be used. Indeed a large number of stages, ten or more, could be used.

The reference numerals used in describing Figure 2 will be used in
5 Figures 3 - 9 to denote equivalent components having equivalent functions except as hereinafter described.

Figure 3 illustrates the use of an optical switch 60 to select the connection of the joint outputs 52 and 57 to an input 61 of a single signal detector 62, the optical switch 60 being operative to connect the signal detector
10 62 either to optical fibre 63 (as shown) to receive electromagnetic signals from Group A, or to optical fibre 64 to receive signals from Group B.

Figure 4 illustrates the addition of a third stage comprising an optical delay 65 connecting array group outputs 66 and 67 sequentially to an input 68 to a single detector 69. The optical delay 65 is chosen such that the signals
15 from Group A will reach the signal detector 69 after the signals from Group B.

Figure 5 is a modification of the system just described with reference to Figure 4, the modification comprising the incorporation of two electromagnetic radiation sources 71 and 72 so that source 71 can radiate electromagnetic radiation through the optical fibre arrays of Group A towards the one end of the
20 optical fibres 40, and source 72 can radiate electromagnetic radiation through the optical fibre arrays of Group B towards the one end of the optical fibres 40. In this manner, the various time delays in Groups A and B will code the radiated electromagnetic radiation. There is also the benefit that only the region that the detector is viewing will be illuminated.

25 Figure 6 illustrates a modification of the system taught in Figure 5 so that only one electromagnetic radiation source 73 is required. It will be noted that the input 68 to the signal detector 69 additionally serves as an output from the source 73.

Figure 7 diagrammatically illustrates how the optical delay 65 of Figure 4
30 can be replaced by a much longer optical delay 74 to increase the time delay between the signals transmitted by the array group outputs 66 and 67. The

increased time delay separates 'packages' of data, in time, from each optical fibre array by such a large amount that ambiguities in the information received by the signal detector 69 are prevented.

In Figure 8 a third stage optical delay 75 is positioned to interconnect the array group output 66 of Group A to an input 76 to the array Group B so that the signal from array group output 66 is delayed by the entire optical system of Group B. In this manner, the output signals from the six optical fibre arrays 11, 12, 13, 14, 15 and 16 are cascaded into the input 68 to the signal detector 69, the optical delay 75 being used to enable the signal detector 69 to differentiate between the signals of Group A and B. The feeding of outputs from earlier groups back into the inputs of later groups is possible because all of the radiation from the earlier stage leaves at approximately the same time.

Figure 9 shows that, instead of having optical delay lines that feed into each other, the stages could have individual delay lines of differing lengths to achieve the same objectives. Thus it will be seen that the array outputs 21 and 22 of optical fibre arrays 11 and 12 are connected in parallel by respective optical delay lines 80 and 81 to the array group output 66. Similarly, the array outputs 24 and 25 of the optical fibre arrays 14 and 15 are connected in parallel to the array group output 67 of Group B by delay lines 82 and 83. This arrangement reduces the number of fibre couplers required but increases the length of optical fibre needed.

Despite the parallel connection of the optical delay lines 80 and 81 to the array group output 66, the array outputs 21, 22 and 23 are connected to transmit electromagnetic radiation in sequence to the array group output 66, this sequencing being achieved by the different delays caused by the optical delay lines 80 and 81. Similarly, the optical delay lines 82 and 83 ensure that the array outputs 24, 25 and 26 are connected to transmit electromagnetic radiation in sequence to the array group output 67.

The Figure 9 system may be varied by replacing the optical delay lines 81, 82 83 and 84 with optical processors which are arranged to tag the electromagnetic signals before arrival at the array group outputs 66, 67. In this

- 8 -

manner the signal detector 69 is enabled to distinguish the signals from each of the fibre arrays 11, 12, 13, 14, 15 and 16.

5

10

15

20

CLAIMS

1. An electromagnetic signal processing system comprising a plurality of optical fibre arrays, each optical fibre array having a cluster of optical fibres with their one ends oriented to receive electromagnetic radiation and arranged to transmit electromagnetic radiation to an array output, and the array outputs are connected to transmit electromagnetic radiation in sequence to a signal detector input.
2. An electromagnetic signal processing system, at Claim 1, in which the sequential connection of the array outputs is through at least one optical delay.
3. An electromagnetic signal processing system, according to Claim 1 or 2, in which the optical fibre arrays are arranged as a plurality of array groups, each array group has a respective array group output, and the array group outputs are connected in series by respective optical delays to the signal detector input.
4. An electromagnetic signal processing system, according to Claim 1 or 2, in which the optical fibre arrays are arranged as a plurality of array groups, each array group has a respective array group output, and an array group output of one array group is connected to an input to another array group.
5. An electromagnetic signal processing system, according to Claim 4, in which the connection of the array group output from one array group to the input of the other array group is through an optical delay.
6. An electromagnetic signal processing system, according to Claim 1 or 2, in which the optical fibre arrays are arranged as a plurality of array groups, each array group has a respective array group output, and an optical switch is arranged operatively between the array group outputs and the signal detector input.

7. An electromagnetic signal processing system, according to any preceding claim, including a source of electromagnetic radiation arranged to radiate discrete pulses of radiation through the array outputs towards the one end of the optical fibres.
- 5 8. An electromagnetic signal processing system, according to Claim 3, in which at least two of the array group outputs include a respective source of electromagnetic radiation arranged to radiate discrete pulses of radiation through the array group outputs towards the one end of the optical fibres, and each source of electromagnetic radiation is arranged
10 so that it may produce its discrete pulses of radiation with different characteristics.
9. An electromagnetic signal processing system, according to any of Claims 2 to 9, in which at least one of the optical delays is provided by a length of optical fibre.
- 15 10. An electromagnetic signal processing system substantially as described herein with reference to the accompanying drawings.

ABSTRACT

5 An electromagnetic signal processing system (10) comprises a plurality of optical fibre arrays (11, 12, 13, 14, 15 and 16) each having a cluster of optical fibres with their one ends (40) oriented to receive electromagnetic radiation and to transmit this electromagnetic radiation to a respective array output (21, 22, 23, 24, 25 and 26) which is connected to transmit electromagnetic radiation in sequence through optical delays (50, 51, 55, 56) to signal detector inputs (52, 57).


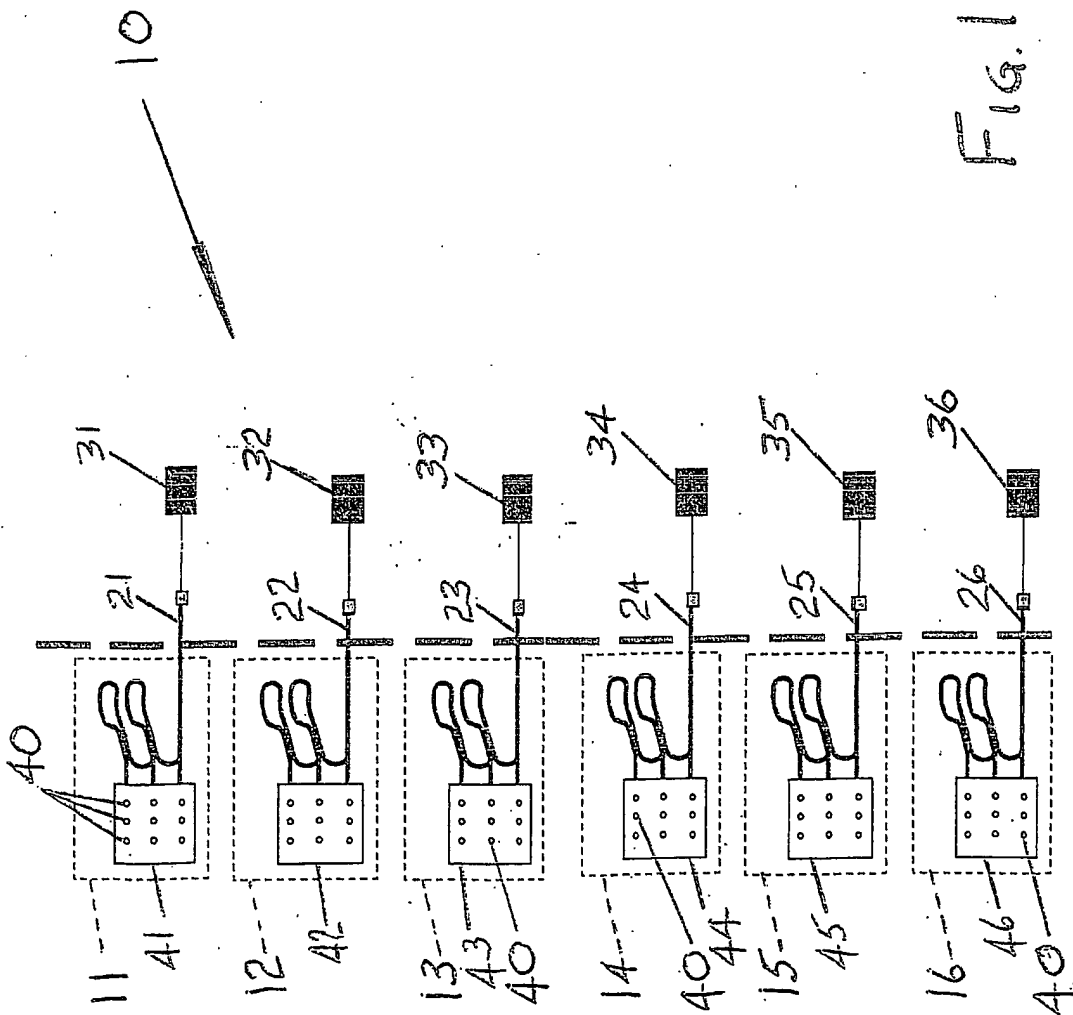


Fig. 1

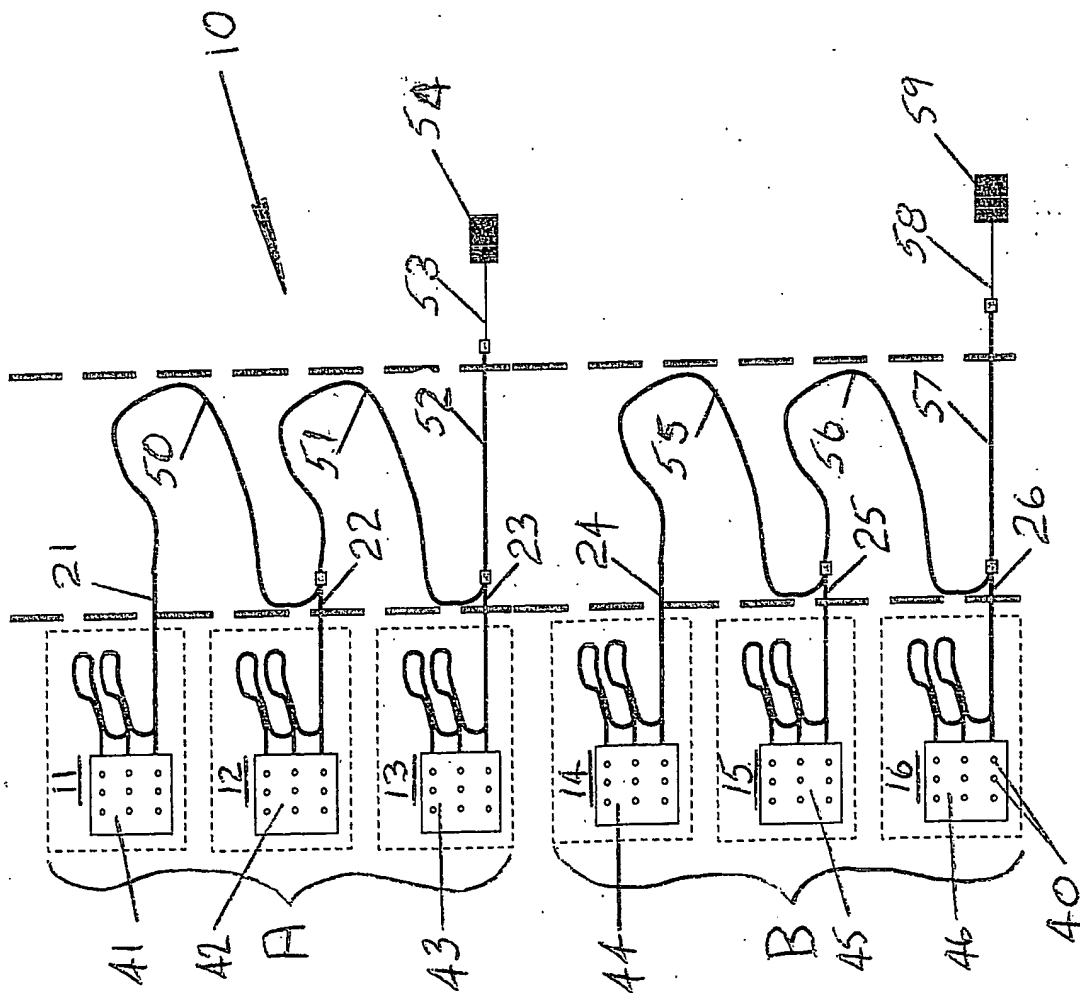

NOT TO BE REPRODUCED

3/9


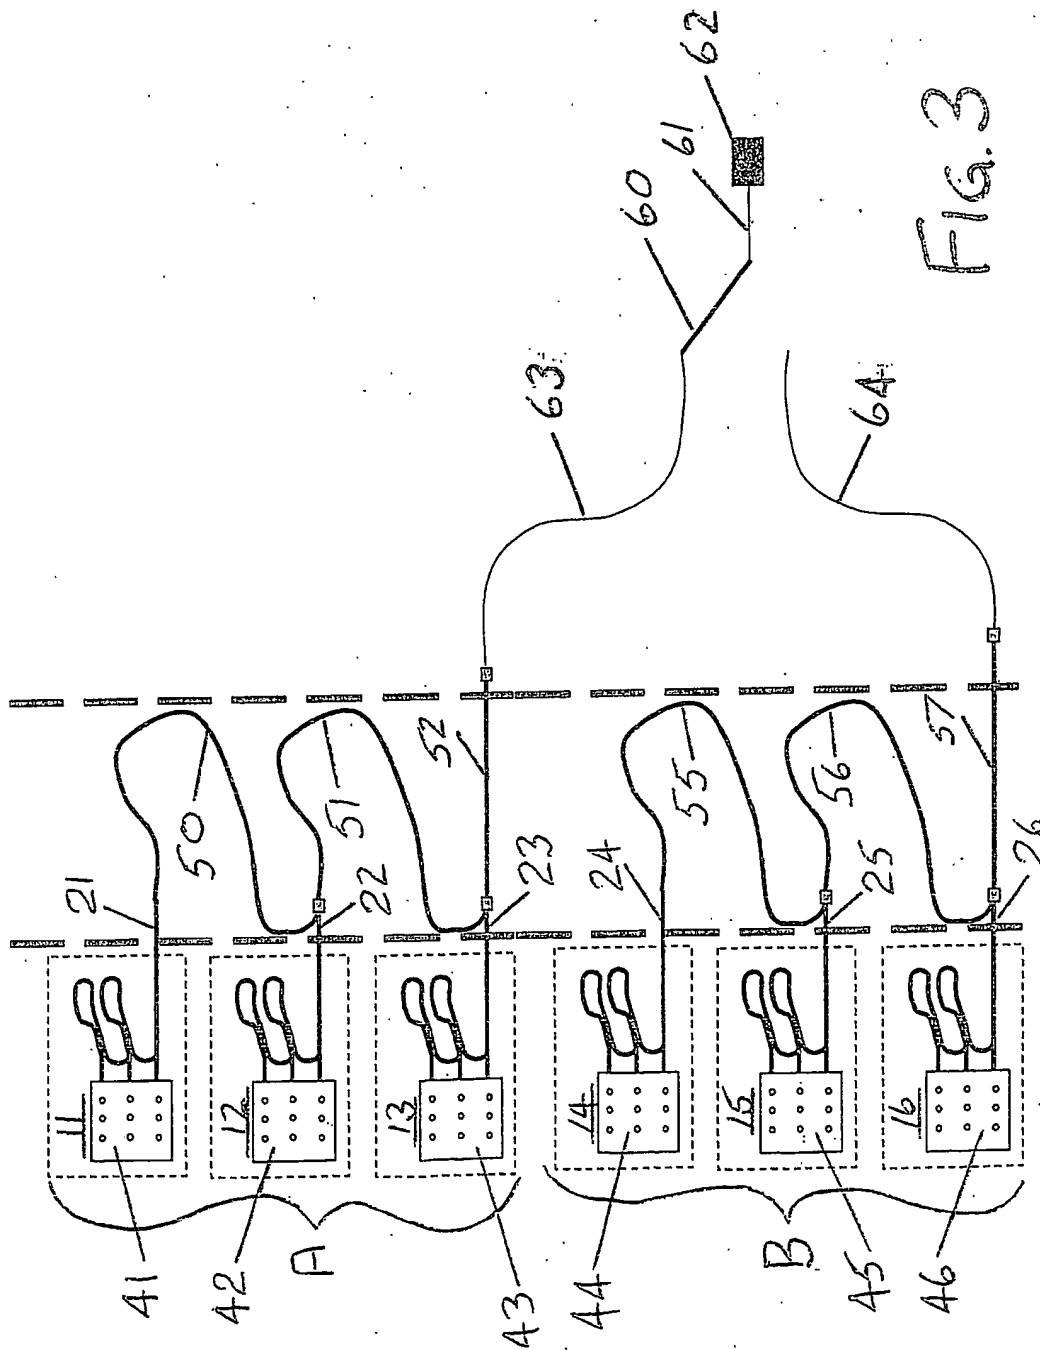


FIG. 3


NOT TO BE AMENDED

4/9

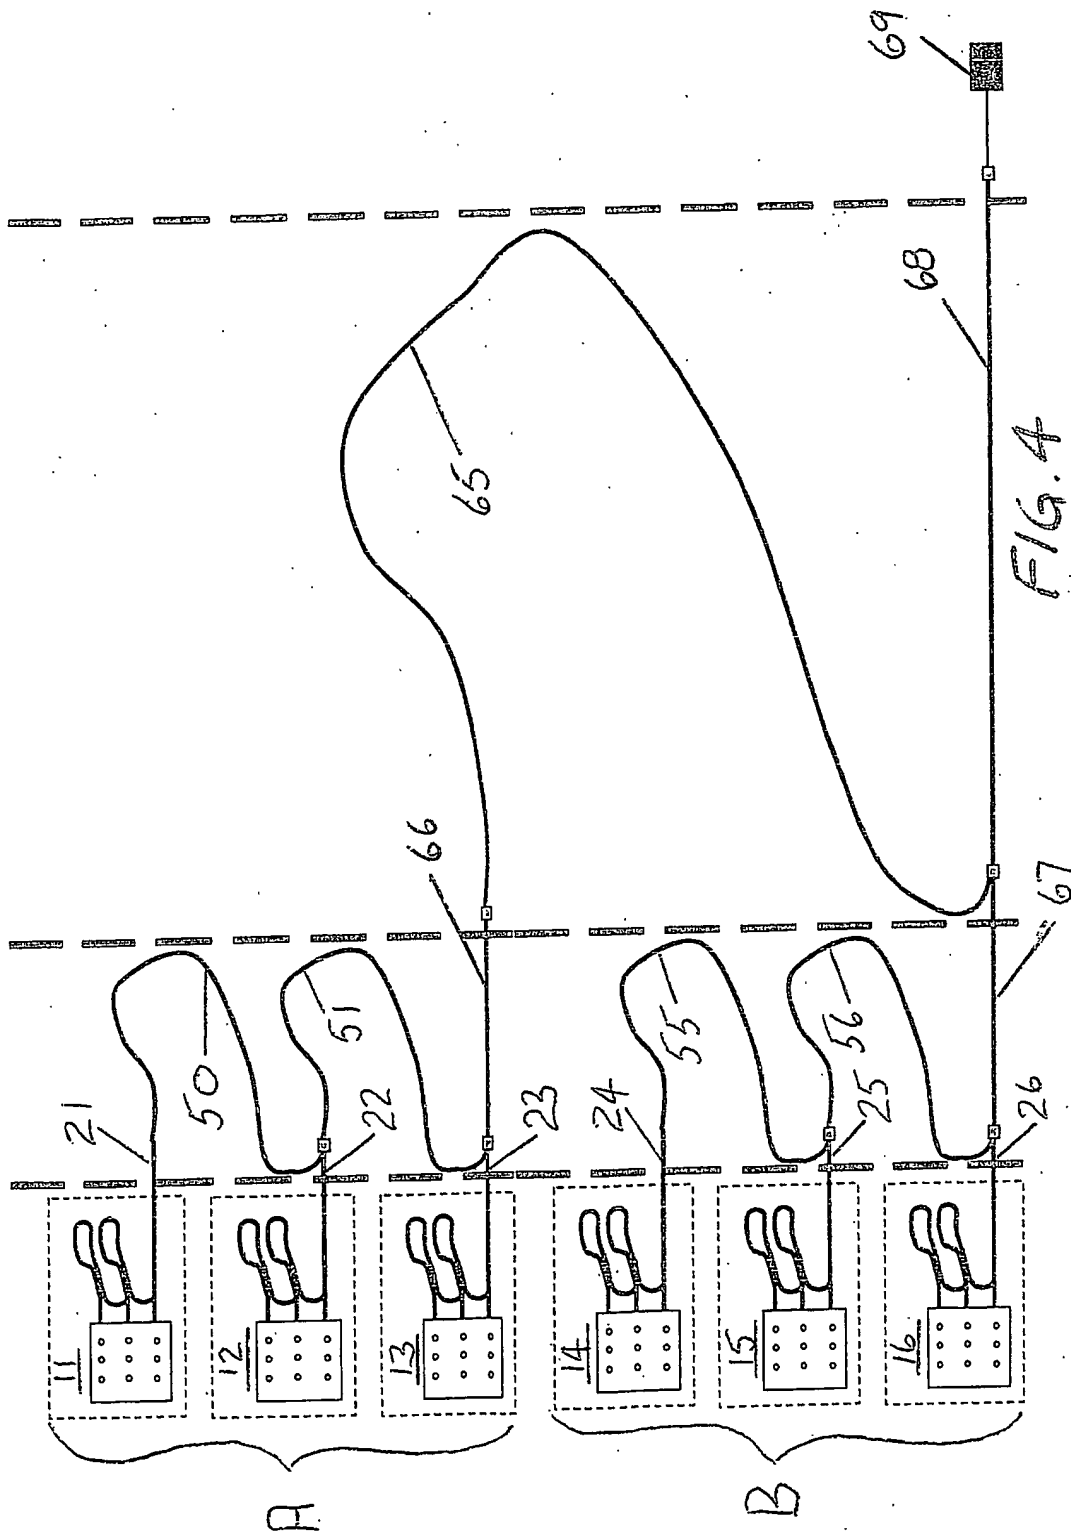


NOT TO BE AMENDED

5/9

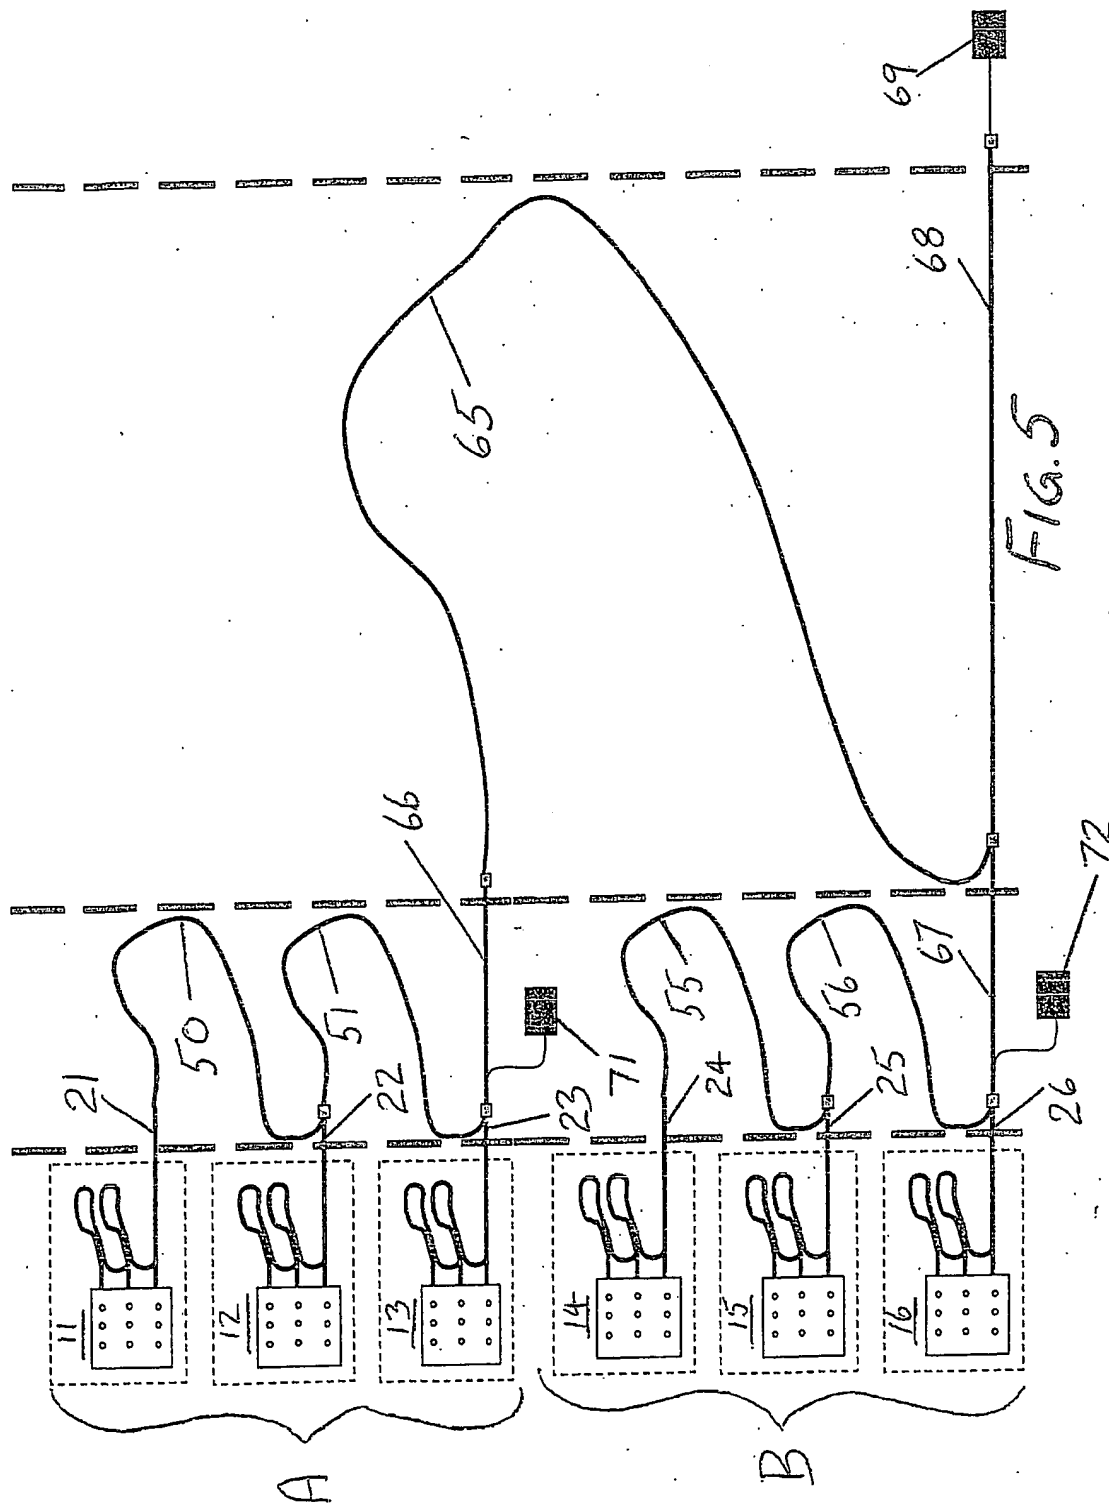

NOT TO BE AMENDED

6/9

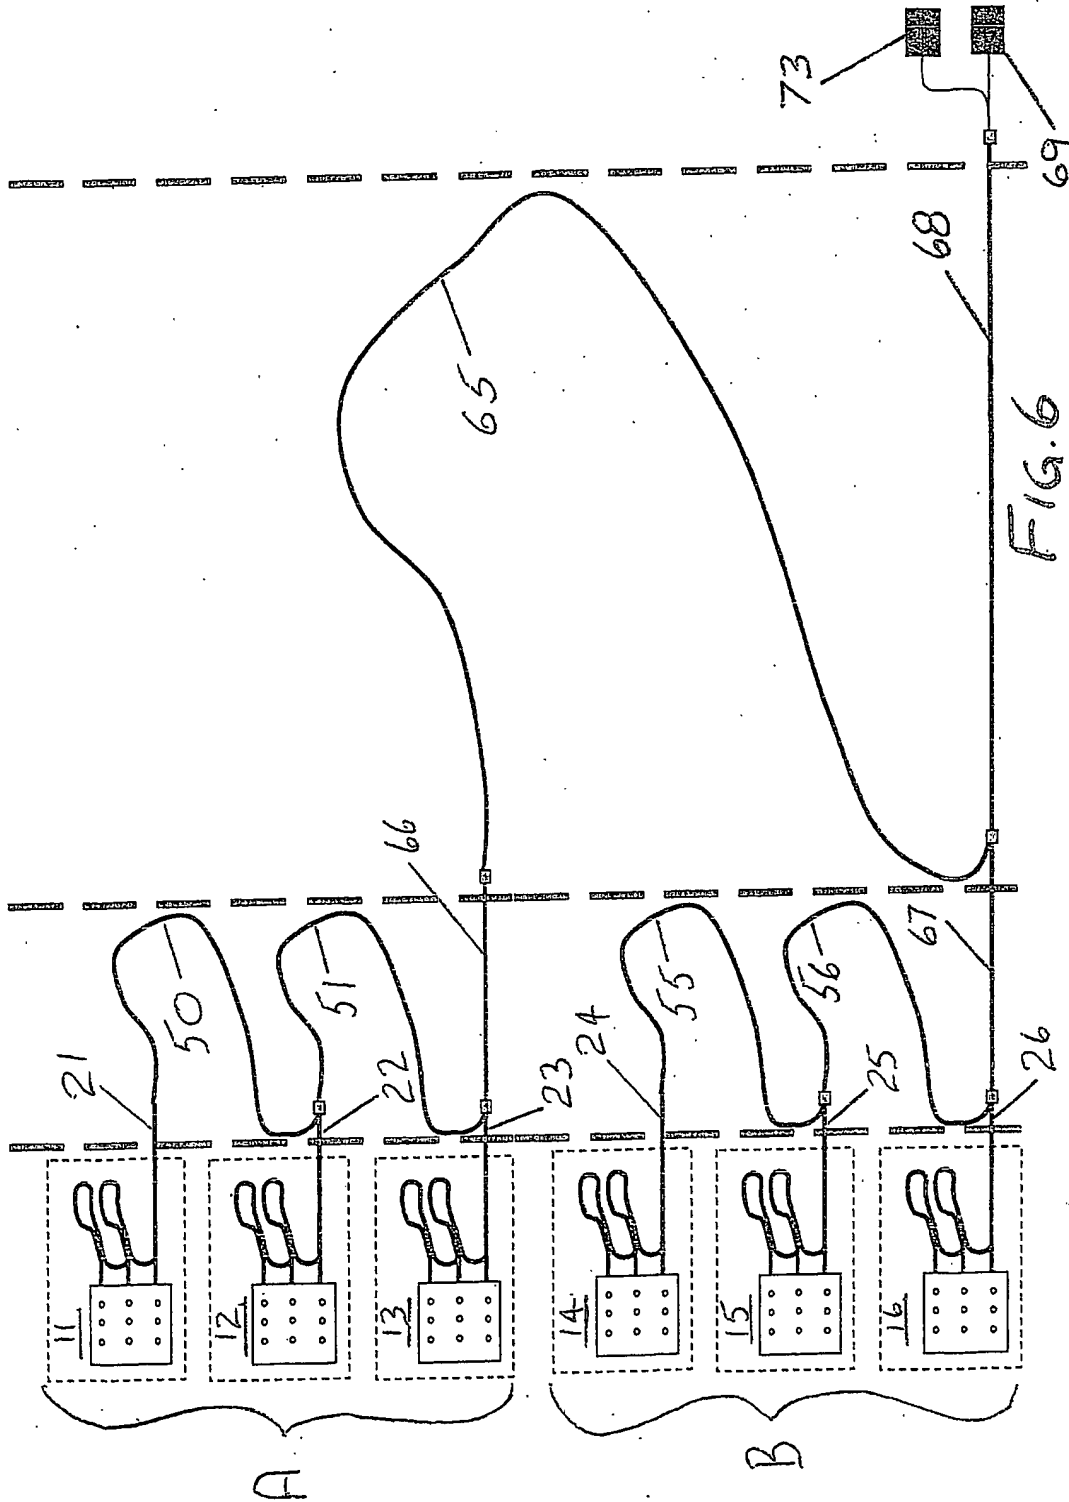

NOT TO BE ASSUMED

NOT TO BE AMENDED

8/9


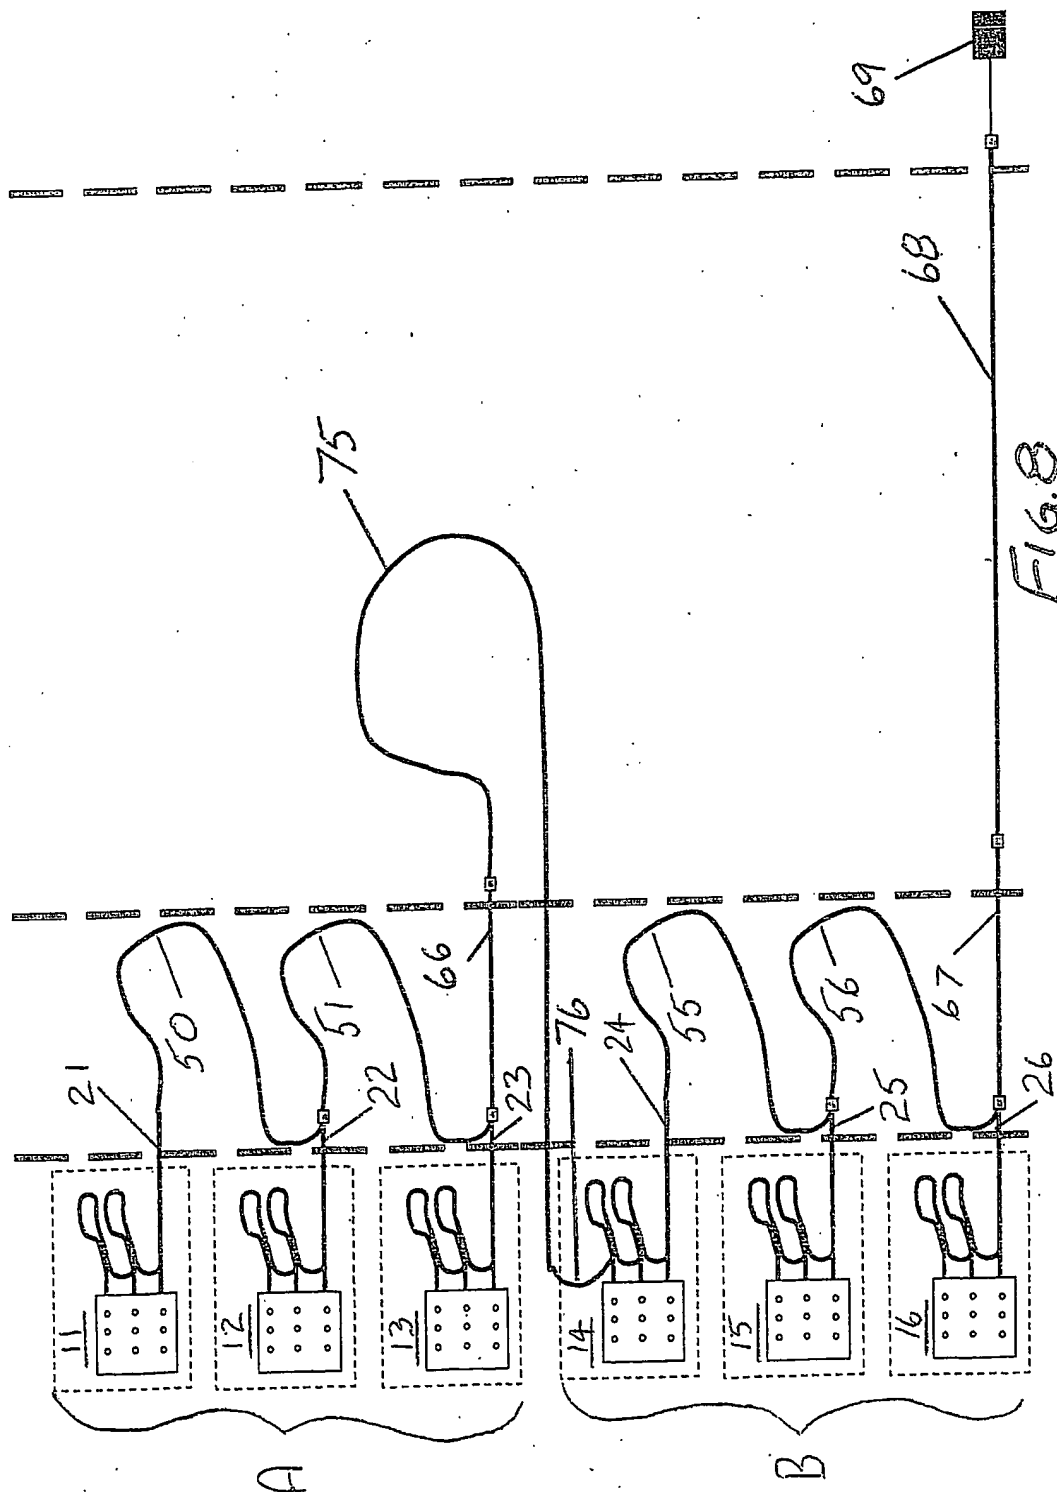


FIG. 8

NOT TO BE REPRODUCED

9/9

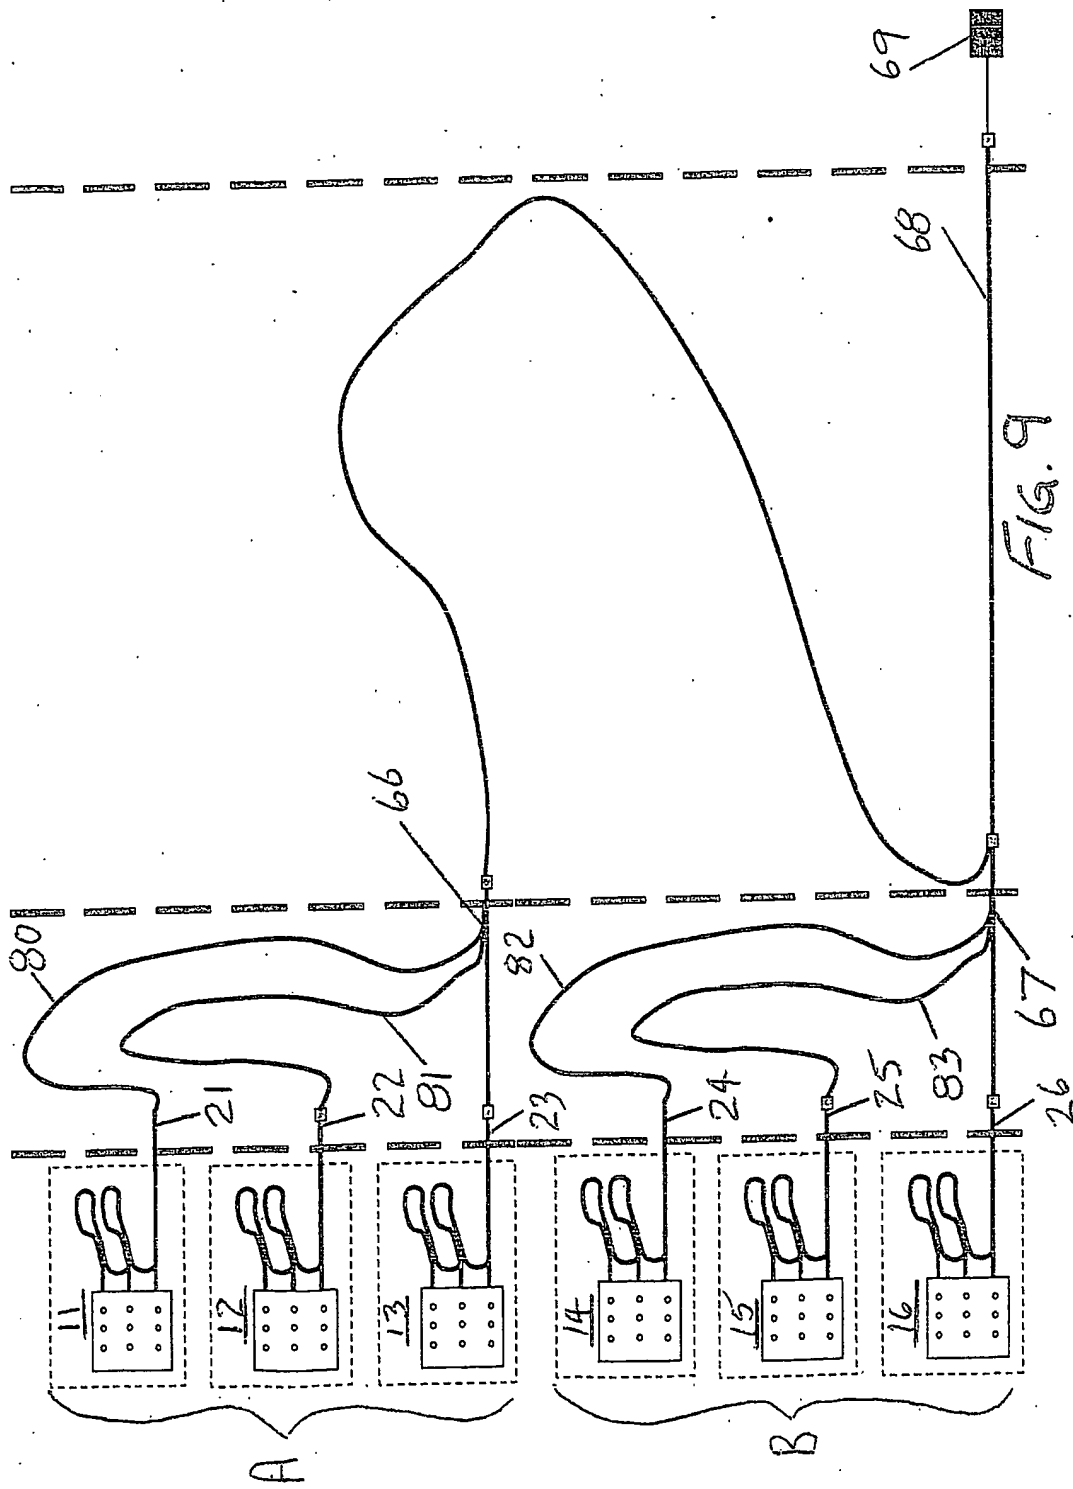

NOT TO BE AMENDED

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.